

Datasheet

SFP Optical Transceiver Product Features

- 1000BASE-ZX Ethernet 19dB SFP
- 80 km ZX SFP for SMF @ 1.25Gbps
- 1270nm 1610nm DFB+PIN Laser 80 km SFP
- 0°C 70°C Temperature Extended/Industrial Available
- 2-Wire Interface Digital Diagnostic Monitoring (SFF-8724)
- Hot-swappable for SFP LC ports
- OptoSpan 1 year standard warranty
- Use with Finisar, Avago, JDSU & networks not requiring OEM compatibility
- SFP MSA / IEEE Std 802.3
- RoHS compliant
- * For OEM Compatibility, use Platinum Series Part# PSFP-11DCXXK080

SFP-11D-K080CXX



- 1.25Gbps Gigabit Ethernet
- Fibre Channel 1x

Applications

Other Optical Links

Description

OptoSpan SFP-11D-K080CXX is a CWDM 1000BASE-ZX Ethernet SFP transceiver designed for long distance optical communications up to 80 km with signaling rates up to 1.25Gbps.

OptoSpan 1Gb CWDM optical transceivers are compatible with many brands such as Finisar, Avago, JDSU and network environments that do not require any special compatibility. For networks that require special OEM compatibility, such as CISCO, BROCADE, JUNIPER, ALCATEL, HP, NORTEL, EMC, QLOGIC and other OEMs, consider OptoSpan Platinum OEM Series transceiver model# PSFP-11DCXXK080.

All OptoSpan long-reach SFP s are ROHS compliant, allow for real-time diagnostic monitoring as per SFF-8472 and designed to meet Multi-Source Agreement (MSA) standards for CWDM transceivers with LC interface.

Optical Budget Calculation for 80 km SFP Optical Transceiver

SFP-11D-K080CXX	Distance: 80 km				Fiber: 1270nm - 1610nm	
	Tx Min dBm	Tx Max dBm	Rx Min dBm	Rx Max dBm	Link Attenuation dB	Power Budget dB
Product Specifications	-5	0	-24	-3		
Optical Calculation Results			-23.5	-18.5	23.5	19



SFP CWDM 80 km transceiver | 1G ZX Ethernet General Specifications

Parameter	Unit	Min.	Тур.	Max
Ab	solute Maximu	m Ratings		
Maximum Supply Voltage	V	-0.5		3.6
Storage Temperature	oC	-40		+85
Case Operating Temperature	oC	0		+70
Recommended Operating Condition				
Supply Voltage	V	3.15	3.3	3.45
Supply Current	mA			300
Data Rate	Gbps		1.25	

Electrical Characteristics

Parameter	Unit	Min.	Тур.	Max
	Transmitt	er		
Differential Input Voltage Swing	mVpp	400		2000
Input Differential Impedance	ohm	85	100	115
Transmit Disable Voltage - High	V	2		Vcc+0.3
Transmit Disable Voltage - Low	V	0		0.8
Transmit Fault Voltage - High	V	2		Vcc+0.3
Transmit Fault Voltage - Low	V	0		0.8
Receiver				
Differential Output Voltage Swing	mVpp	400		2000
Differential Output Impedance	ohms	85	100	115
LOS Output Voltage - High	V	2		Vcc+0.3
LOS Output Voltage - Low	V	0		0.8




Optical Characteristics


Parameter	Unit	Min.	Тур.	Max	
	Transmitter				
Output Optical Power	dBm	-5		0	
Optical Extinction Ratio	dB	8.2			
Optical Wavelength	nm	□λc-6□	λο□	λc+7.5	
Spectral Width	nm			1	
Side Mode Suppression Ratio	dB	30			
Receiver					
Optical Center Wavelength	nm	1260		1600	
Receiver Sensitivity @ 1.25	dBm	-24		-3	
LOS DE-Assert	dBm			-25	
LOS Assert	dBm	-42			

Laser Safety

This is a class 1 Laser Product according to IEC 60825-1:1993:+A1:1997+A2:2001. This product complies with 21 CFR 1040.10 and 1040 except for deviations pursuant to Laser Notice No. 50, dated July 26, 2001.



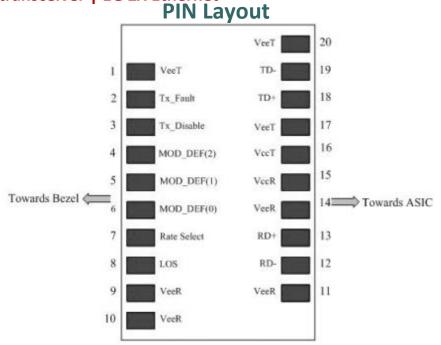

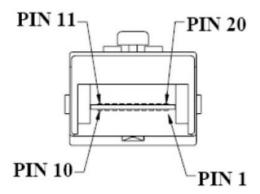





PIN Functions

Pin # Name - Description 1 Transmitter Ground 2 Transmitter Fault Indication 3 Transmitter Disable 4 Module Definition 2 5 Module Definition 0 7 Not Connected 8 Loss of Signal 9 Receiver Ground 10 Receiver Ground 11 Receiver Ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29	D: #	Name Description
Transmitter Fault Indication Transmitter Disable Module Definition 2 Module Definition 0 Not Connected Loss of Signal Receiver Ground In Receiver Ground In Received Data Out Receiver Ground Receiver Ground Receiver Ground Transmitter Power Transmitter Power Transmitter Ground Transmit Data In Transmitter Ground Transmit Data In Transmitter Ground Transmitter Ground Transmitter Ground Transmitter Ground Transmitter Ground	Pin #	Name - Description
3 Transmitter Disable 4 Module Definition 2 5 Module Definition 0 7 Not Connected 8 Loss of Signal 9 Receiver Ground 10 Receiver Ground 11 Receiver Ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28		
4 Module Definition 2 5 Module Definition 1 6 Module Definition 0 7 Not Connected 8 Loss of Signal 9 Receiver Ground 10 Receiver Ground 11 Receiver Ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	2	Transmitter Fault Indication
5 Module Definition 1 6 Module Definition 0 7 Not Connected 8 Loss of Signal 9 Receiver Ground 10 Receiver Ground 11 Receiver Ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	3	Transmitter Disable
6 Module Definition 0 7 Not Connected 8 Loss of Signal 9 Receiver Ground 10 Receiver Ground 11 Receiver Ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	4	Module Definition 2
7 Not Connected 8 Loss of Signal 9 Receiver Ground 10 Receiver Ground 11 Receiver Ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	5	Module Definition 1
8 Loss of Signal 9 Receiver Ground 10 Receiver Ground 11 Receiver Ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	6	Module Definition 0
9 Receiver Ground 10 Receiver Ground 11 Receiver Ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	7	Not Connected
10 Receiver Ground 11 Receiver Ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	8	Loss of Signal
11 Receiver Ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	9	Receiver Ground
12 Inv. Received Data Out 13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	10	Receiver Ground
13 Received Data Out 14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	11	Receiver Ground
14 Receiver Ground 15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	12	Inv. Received Data Out
15 Receiver Power 16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	13	Received Data Out
16 Transmitter Power 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	14	Receiver Ground
17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	15	Receiver Power
18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21	16	Transmitter Power
19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28	17	Transmitter Ground
20 Transmitter Ground 21 22 23 24 25 26 27 28	18	Transmit Data In
21	19	Inv. Transmit Data In
22 23 24 25 26 27 28	20	Transmitter Ground
23 24 25 26 27 28	21	
24 25 26 27 28	22	
25 26 27 28	23	
26 27 28	24	
27 28	25	
28	26	
	27	
29	28	
	29	
30	30	



SFP CWDM 80 km transceiver | 1G ZX Ethernet Mechanical Layouts

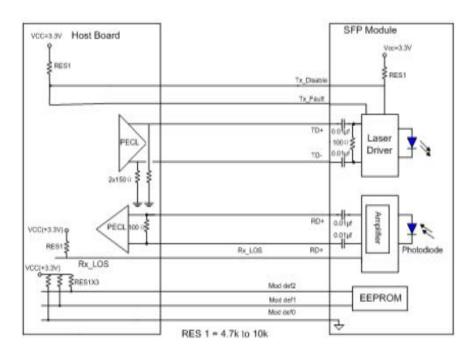

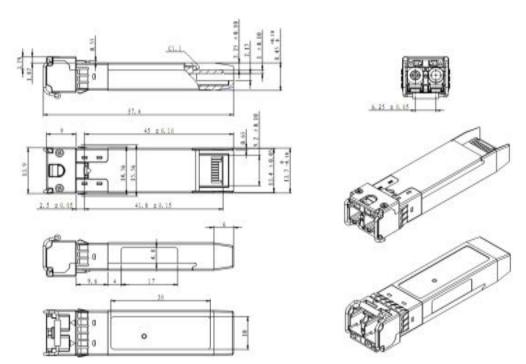

OptoSpan reserves the right to make changes or to discontinue any optical product or service without any notice. Applications and features described herein are for illustrative purposes only. OptoSpan makes no representation of warranty that such applications or features will be suitable for any specific use or compatibility without further testing or modifications. Not responsible for typographical errors.