

Datasheet

SFP Optical Transceiver Product Features

- 1000BASE-ZX Ethernet 28dB SFP
- 100 km ZX SFP for SMF @ 1.25Gbps
- 1550nm DFB+APD Laser 100 km SFP
- 0°C 70°C Temperature Extended/Industrial Available
- 2-Wire Interface Digital Diagnostic Monitoring (SFF-8724)
- Hot-swappable for SFP LC ports
- OptoSpan 1 year standard warranty
- Use with Finisar, Avago, JDSU & networks not requiring OEM compatibility
- SFP MSA / IEEE Std 802.3
- RoHS compliant
- * For OEM Compatibility, use Platinum Series Part# PSFP-11DT55K100

SFP-11D-K100T55



- 1.25Gbps Gigabit Ethernet
- Fibre Channel 1x

Applications

Other Optical Links

Description

OptoSpan SFP-11D-K100T55 is a Duplex 1000BASE-ZX Ethernet SFP transceiver designed for long distance optical communications up to 100 km with signaling rates up to 1.25Gbps.

OptoSpan 1Gb Standard optical transceivers are compatible with many brands such as Finisar, Avago, JDSU and network environments that do not require any special compatibility. For networks that require special OEM compatibility, such as CISCO, BROCADE, JUNIPER, ALCATEL, HP, NORTEL, EMC, QLOGIC and other OEMs, consider OptoSpan Platinum OEM Series transceiver model# PSFP-11DT55K100.

All OptoSpan long-reach SFP s are ROHS compliant, allow for real-time diagnostic monitoring as per SFF-8472 and designed to meet Multi-Source Agreement (MSA) standards for Duplex transceivers with LC interface.

Optical Budget Calculation for 100 km SFP Optical Transceiver

SFP-11D-K100T55	Distance: 100 km				Fiber: 1550nm SMF	
	Tx Min dBm	Tx Max dBm	Rx Min dBm	Rx Max dBm	Link Attenuation dB	Power Budget dB
Product Specifications	0	5	-28	-3		
Optical Calculation Results			-26.6	-21.6	26.6	28



General Specifications

Parameter	Unit	Min.	Тур.	Max
Ab	solute Maximu	m Ratings	•	
Maximum Supply Voltage	V	-0.5		3.6
Storage Temperature	oC	-40		+85
Case Operating Temperature	oC	0		+70
Recommended Operating Condition				
Supply Voltage	V	3.13	3.3	3.45
Supply Current	mA			300
Data Rate	Gbps		1.25	

Electrical Characteristics

Parameter	Unit	Min.	Тур.	Max
	Transmitt	er		
Differential Input Voltage Swing	mVpp	500		2400
Input Differential Impedance	ohm	85	100	115
Transmit Disable Voltage - High	V	2.0		Vcc
Transmit Disable Voltage - Low	V	0		0.8
Transmit Fault Voltage - High	V	2.0		Vcc+0.3
Transmit Fault Voltage - Low	V	0		0.5
Receiver				
Differential Output Voltage Swing	mVpp	370		2000
Differential Output Impedance	ohms	85	100	115
LOS Output Voltage - High	V	2.0		Vcc+0.3
LOS Output Voltage - Low	V	0		0.8



Optical Characteristics

Parameter	Unit	Min.	Тур.	Max
	Transmitter			
Output Optical Power	dBm	0		5
Optical Extinction Ratio	dB	9		
Optical Wavelength	nm	1500	1550	1580
Spectral Width	nm			1
Side Mode Suppression Ratio	dB	30		
	Receive	•		
Optical Center Wavelength	nm	1260		1600
Receiver Sensitivity @	dBm	-28		-3
LOS DE-Assert	dBm			-29
LOS Assert	dBm	-42		


Laser Safety


This is a class 1 Laser Product according to IEC 60825-1:1993:+A1:1997+A2:2001. This product complies with 21 CFR 1040.10 and 1040 except for deviations pursuant to Laser Notice No. 50, dated July 26, 2001.

Optospan

SFP 100 km transceiver | 1G ZX Ethernet

PIN Layout

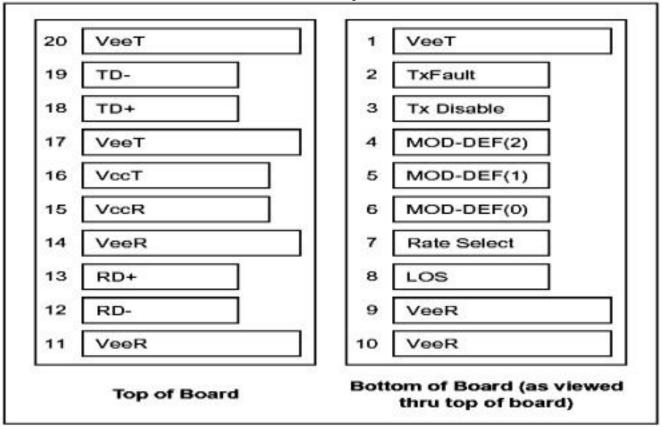

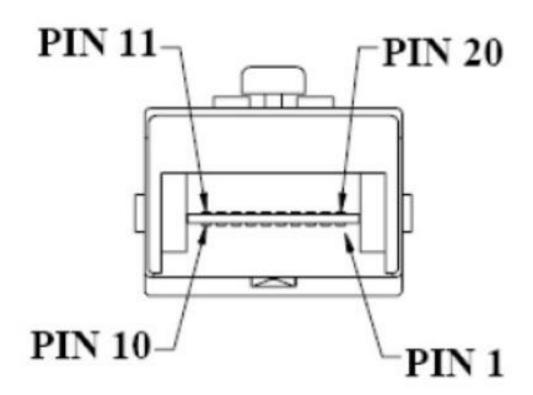





PIN Functions

1 Transmitter Ground 2 Transmitter Fault Indication 3 Transmitter Disable 4 SDA Serial Data Signal 5 SCL Serial Clock Signal 6 TTL Low 7 Not Connected 8 Loss of Signal 9 Receiver ground 10 Receiver ground 11 Receiver ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmitter Ground 20 Transmitter Ground 21 Inv. Transmitter Ground 22 Inv. Transmitter Ground 23 Inv. Transmitter Ground 24 Inv. Transmitter Ground 25 Inv. Transmitter Ground 26 Inv. Transmitter Ground 27 Inv. Transmitter Ground 28 Inv. Transmitter Ground 29 Inv. Transmitter Ground 20 Inv. Transmitter Ground 21 Inv. Transmitter Ground 22 Inv. Transmitter Ground 23 Inv. Transmitter Ground 24 Inv. Transmitter Ground 26 Inv. Transmitter Ground 27 Inv. Transmitter Ground 28 Inv. Transmitter Ground 29 Inv. Transmitter Ground	Pin#	Name - Description
Transmitter Fault Indication Transmitter Disable SDA Serial Data Signal SCL Serial Clock Signal TTL Low Not Connected Loss of Signal Receiver ground Receiver ground Inv. Received Data Out Receiver ground Receiver ground Receiver ground Receiver ground Transmitter Power Supply Transmitter Power Supply Transmitter Ground Transmit Data In Inv. Transmit Data In Transmitter Ground Transmitter Ground Transmitter Ground Transmitter Ground Transmitter Ground		
Transmitter Disable SDA Serial Data Signal SCL Serial Clock Signal TTL Low Not Connected Loss of Signal Receiver ground Receiver ground Inv. Received Data Out Receiver dound Receiver Dower Supply Transmitter Power Supply Transmitter Power Supply Transmitter Ground Transmit Data In Inv. Transmit Data In Transmitter Ground		
4 SDA Serial Data Signal 5 SCL Serial Clock Signal 6 TTL Low 7 Not Connected 8 Loss of Signal 9 Receiver ground 10 Receiver ground 11 Receiver ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
5 SCL Serial Clock Signal 6 TTL Low 7 Not Connected 8 Loss of Signal 9 Receiver ground 10 Receiver ground 11 Receiver ground 11 Received Data Out 13 Received Data Out 14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
6 TTL Low 7 Not Connected 8 Loss of Signal 9 Receiver ground 10 Receiver ground 11 Receiver ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
7 Not Connected 8 Loss of Signal 9 Receiver ground 10 Receiver ground 11 Received Data Out 12 Inv. Received Data Out 13 Received Data Out 14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
8 Loss of Signal 9 Receiver ground 10 Receiver ground 11 Receiver ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
9 Receiver ground 10 Receiver ground 11 Receiver ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
10 Receiver ground 11 Receiver ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
11 Receiver ground 12 Inv. Received Data Out 13 Received Data Out 14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
12 Inv. Received Data Out 13 Received Data Out 14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
13 Received Data Out 14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
14 Receiver ground 15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
15 Receiver Power Supply 16 Transmitter Power Supply 17 Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
Transmitter Power Supply Transmitter Ground Transmit Data In Inv. Transmit Data In Transmitter Ground Transmitter Ground 21 22 23 24 25 26 27 28 29		
Transmitter Ground 18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21		111
18 Transmit Data In 19 Inv. Transmit Data In 20 Transmitter Ground 21		
19 Inv. Transmit Data In 20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
20 Transmitter Ground 21 22 23 24 25 26 27 28 29		
21		
22 23 24 25 26 27 28 29		Transmitter Ground
23 24 25 26 27 28 29		
24 25 26 27 28 29	22	
25 26 27 28 29	23	
26 27 28 29	24	
27 28 29	25	
28 29	26	
29	27	
	28	
30	29	
	30	



Mechanical Layouts

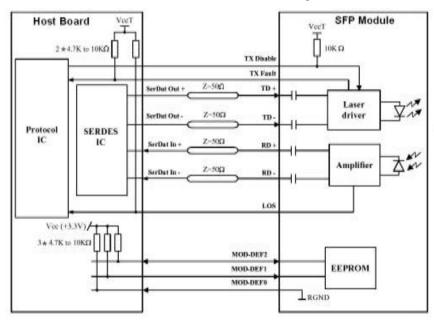

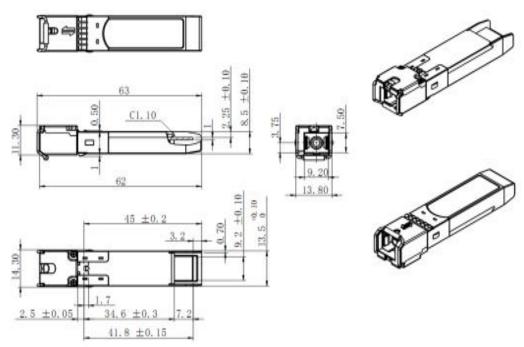

OptoSpan reserves the right to make changes or to discontinue any optical product or service without any notice. Applications and features described herein are for illustrative purposes only. OptoSpan makes no representation of warranty that such applications or features will be suitable for any specific use or compatibility without further testing or modifications. Not responsible for typographical errors.