

SFP 100m transceiver | Cisco Compatible 1G 10/100/1000 BASE-T

Designed for OEM networks such as Cisco, HP, Juniper, Brocade, Alcatel etc.

Datasheet

SFP Optical Transceiver Product Features

- Exclusive Japanese OSAs for Ultimate Reliability
- 10/100/1000 BASE-T SFP
- 100m Duplex SFP for Copper @ 1.25Gbps
- Laser 100m SFP
- 0°C - 70°C Temperature - Extended/Industrial Available
- 2-Wire Interface Digital Diagnostic Monitoring (SFF-8724)
- Hot-swappable for SFP LC ports
- Extended 2 Years Warranty
- Tested and Certified in Brand Specific Networks and Target Applications
- Assembled Using Highest Quality Raw Components
- SFP MSA / IEEE Std 802.3 & ROHS

PSFP-CPRBXXM100



Applications

- 1.25Gbps Gigabit Ethernet
- 10/100/1000Base-T
- SGMII Interface
- Router/Server Interface

Description

Platinum OEM Series PSFP-CPRBXXM100 is a Cisco Compatible Duplex 10/100/1000 BASE-T SFP transceiver designed for long distance optical communications up to 100m with signaling rates up to 1.25Gbps.

OptoSpan Platinum OEM Series 1.25Gbps Duplex optical transceivers have undergone rigorous qualification and certification testing to provide End-to-End Compatibility using switching equipment from CISCO, BROCADE, JUNIPER, ALCATEL, HP (select models), NORTEL, EMC, QLOGIC and other OEMs.

All OptoSpan Platinum OEM Series long-reach SFP s are ROHS compliant, allow for real-time diagnostic monitoring as per SFF-8472 and designed to meet Multi-Source Agreement (MSA) standards for Duplex transceivers with LC interface.

Optical Budget Calculation for 100m Platinum OEM SFP Optical Transceiver

PSFP-CPRBXXM100	Distance: 100m				Fiber: Copper	
	Tx Min dBm	Tx Max dBm	Rx Min dBm	Rx Max dBm	Link Attenuation dB	Power Budget dB
Product Specifications						
Optical Calculation Results						

SFP 100m transceiver | Cisco Compatible 1G 10/100/1000 BASE-T

General Specifications

Parameter	Unit	Min.	Typ.	Max
Absolute Maximum Ratings				
Maximum Supply Voltage	V	-0.5		4.0
Storage Temperature	°C	-40		85
Case Operating Temperature	°C	0		70
Recommended Operating Condition				
Supply Voltage	V	3.15	3.3	3.45
Supply Current	mA			350
Data Rate	Gbps			1.25

Electrical Characteristics

Parameter	Unit	Min.	Typ.	Max
Transmitter				
Differential Input Voltage Swing	mVpp	250		1200
Input Differential Impedance	ohm		50	
Transmit Disable Voltage - High	V			
Transmit Disable Voltage - Low	V			
Transmit Fault Voltage - High	V			
Transmit Fault Voltage - Low	V			
Receiver				
Differential Output Voltage Swing	mVpp	350		800
Differential Output Impedance	ohms		50	
LOS Output Voltage - High	V			
LOS Output Voltage - Low	V			

SFP 100m transceiver | Cisco Compatible 1G 10/100/1000 BASE-T

Optical Characteristics



Parameter	Unit	Min.	Typ.	Max
Transmitter				
Output Optical Power	dBm			
Optical Extinction Ratio	dB			
Optical Wavelength	nm			
Spectral Width	nm			
Side Mode Suppression Ratio	dB			
Receiver				
Optical Center Wavelength	nm			
LOS DE-Assert	dBm			
LOS Assert	dBm			

Laser Safety

This is a class 1 Laser Product according to IEC 60825-1:1993:+A1:1997+A2:2001. This product complies with 21 CFR 1040.10 and 1040 except for deviations pursuant to Laser Notice No. 50, dated July 26, 2001.

SFP 100m transceiver | Cisco Compatible 1G 10/100/1000 BASE-T

PIN Layout

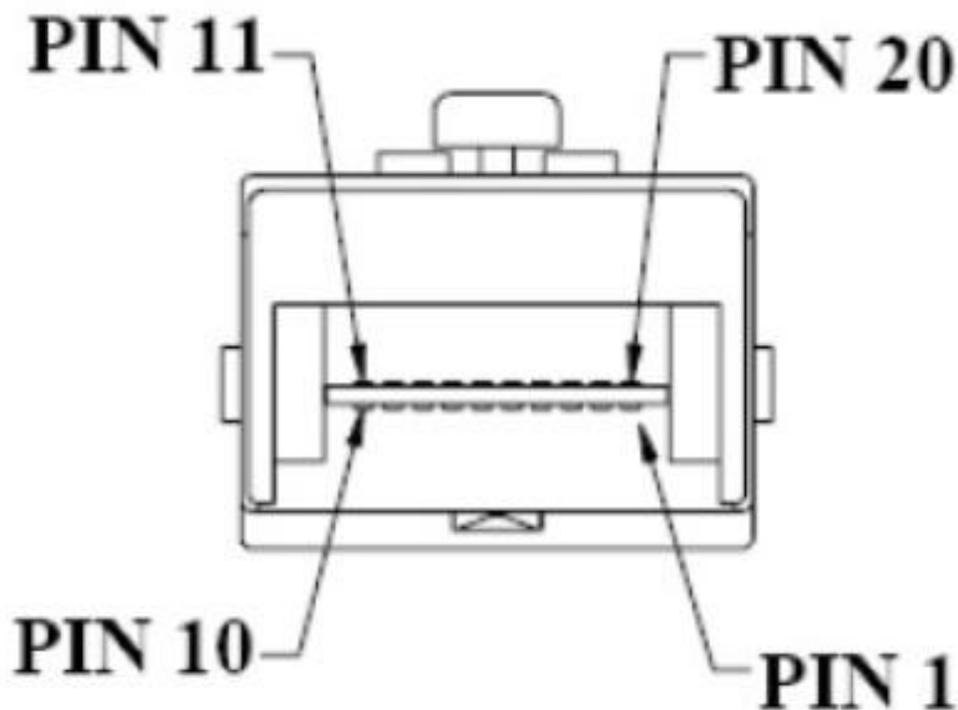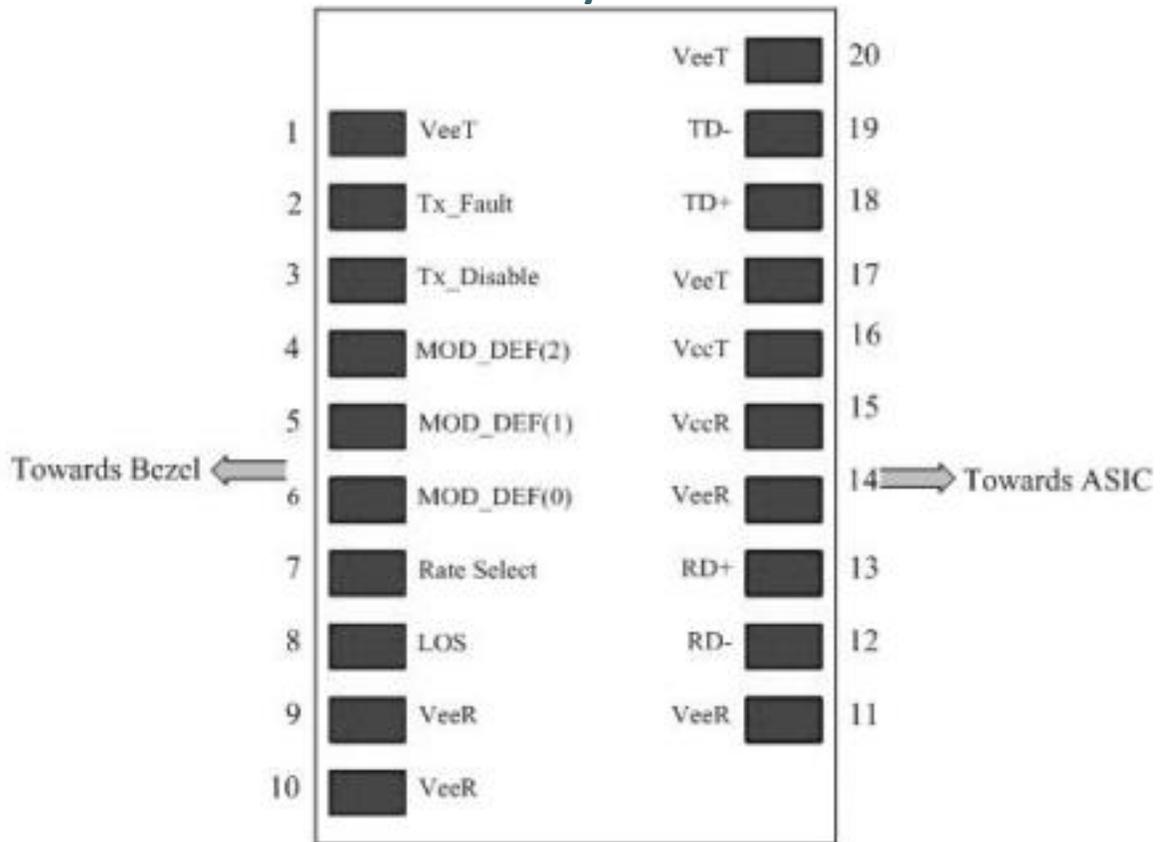

SFP 100m transceiver | Cisco Compatible 1G 10/100/1000 BASE-T
PIN Functions

Pin #	Name - Description
1	Transmitter Ground
2	Transmitter Fault Indication
3	Transmitter Disable
4	Module Definition 2
5	Module Definition 1
6	Module Definition 0
7	Not Connected
8	Loss of Signal
9	Receiver Ground
10	Receiver Ground
11	Receiver Ground
12	Inv. Received Data Out
13	Received Data Out
14	Receiver Ground
15	Receiver Power
16	Transmitter Power
17	Transmitter Ground
18	Transmit Data In
19	Inv. Transmit Data In
20	Transmitter Ground
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	

